

AGENTIC-ARBITER


Free-cooling decision report · Stonewall Creek Business Park, VA · station KJYO · 2021-04-08

An agent decides, hour by hour, whether this data centre can switch its mechanical chillers off and cool with outside air instead. Every hour it releases carries a safety margin measured from the agent's own past errors, and it declines the hours it cannot stand behind.

\$337k – \$976k at this site: \$337,304 to \$976,027, at \$4,721 to \$6,831 per MW of IT load per year MODELED	9.1% less mechanical cooling runtime, a share so it holds at any hall size	+347 h chiller-hours recovered per year against the control operators run today	43,249 hours of real recorded weather, 912 days held out	65.6% bound coverage on the four measured forecast pairs, against a 90% target
--	--	---	--	--

The agent's day, hour by hour

2 of 24 hours free cooling

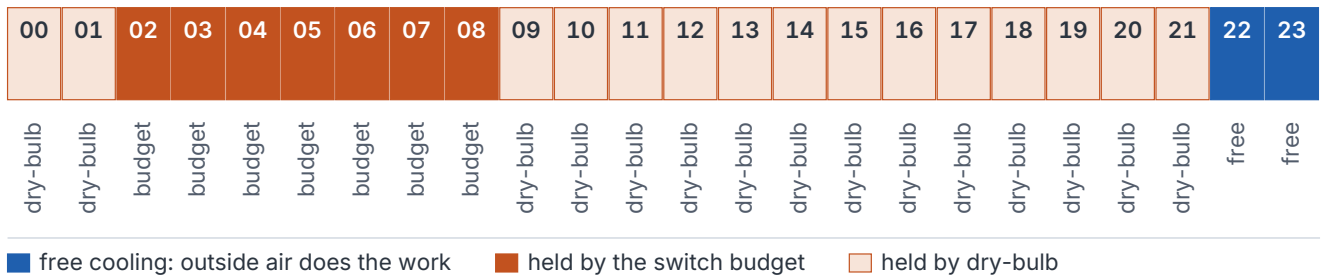

What this day shows

- Just **2 of the 24 hours** ran on outside air. The remaining **22** ran chillers, and every one of them has a named reason rather than a default.
- One constraint** shaped the day: Blocked by air temperature accounts for 15 of the 24 hours, 00:00 to 01:00, 09:00 to 21:00.
- The bound held** across 912 days the agent never trained on. It took **12,588** free-cooling hours and **6** of them turned out unsafe: 0.48 per thousand.
- The forecast is the product**: hold everything else and drop the forecast to no skill at all, and the 347 hours a year this recovers becomes 74.


What makes this different from a thermostat with a forecast attached: where the site geometry defeats the physics, the agent refuses the hour rather than return a number it cannot stand behind, and the cost of that caution is measured and published rather than hidden.

Contents

This document is one site's complete analysis. Page 1 is the whole argument; everything after it is the evidence.

- 1 Executive summary** what the agent did on this day, what it is worth, and how well the bound held
- 2 The site** the two halls, the gap the exhaust crosses, and what the imagery can and cannot show
- 3 The findings** the bound against the limit hour by hour, and the comparison with the incumbent
- 4 How the decision is made** the margin and where each degree of it comes from, the gates, the switch budget
- 5 The physics** the exhaust plume solved on this building's own footprint, and why it needs a GPU
- 6 Validation, and how the bound is measured** held-out testing, and how the bound's coverage is measured as the record grows
- 7 Scale, and what it is worth** the same agent across every covered site, and who buys this
- 8 Appendix: every hour, and each reason once** the full schedule, and each distinct reason explained once

The site

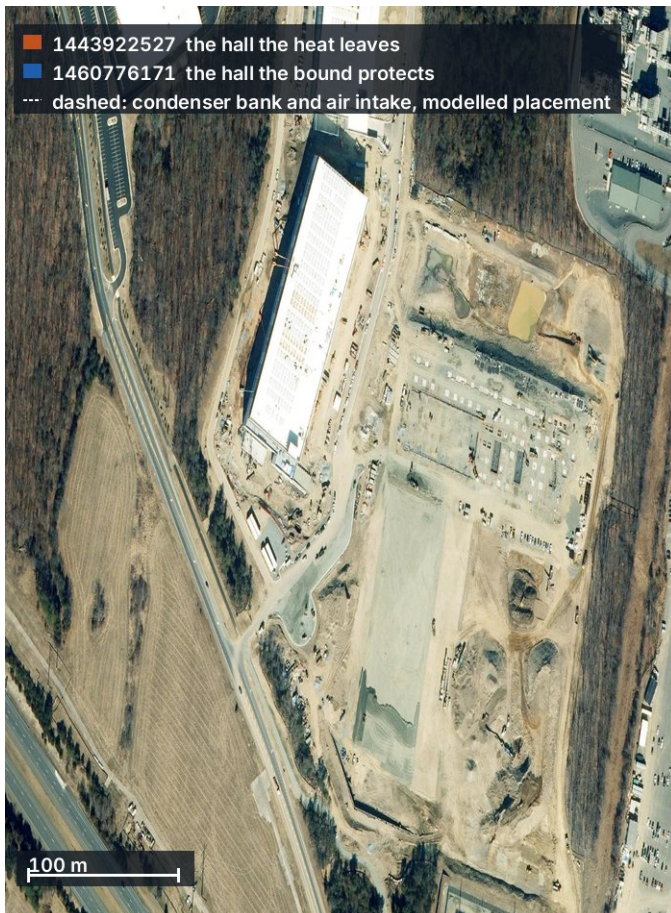

Two halls, 1443922527 and 1460776171, both operated by OSM way. The agent is deciding for the second one. When its neighbour rejects heat from the condensers along the facing wall, that warm air has only **112.4 m** of open ground to cross before it reaches the air this building breathes.

That is what a **plume** is: a moving body of warmer air leaving one building and drifting with the wind. It matters because free cooling only works while the air arriving at the intake is genuinely cool. A thermostat reading the regional forecast cannot see this, because the forecast is for the region and the plume is a hundred metres wide.

So the agent solves for it on this footprint, at this separation, for every wind bearing, and carries the answer as extra margin before it will release an hour.

ESRI World Imagery. 0.3-0.5 m resolution shows objects, not nameplates. Cannot certify unit type or measure heights. Outlines are OpenStreetMap ways 1443922527 and 1460776171 on an independently georeferenced basemap, so an


edge can sit a few metres off the roofline; every distance in this report is computed from the OpenStreetMap geometry, not from the picture.

The findings

Charts first. The prose under each one says only what the chart cannot.

The bound against the plant limit

degrees Celsius at the intake

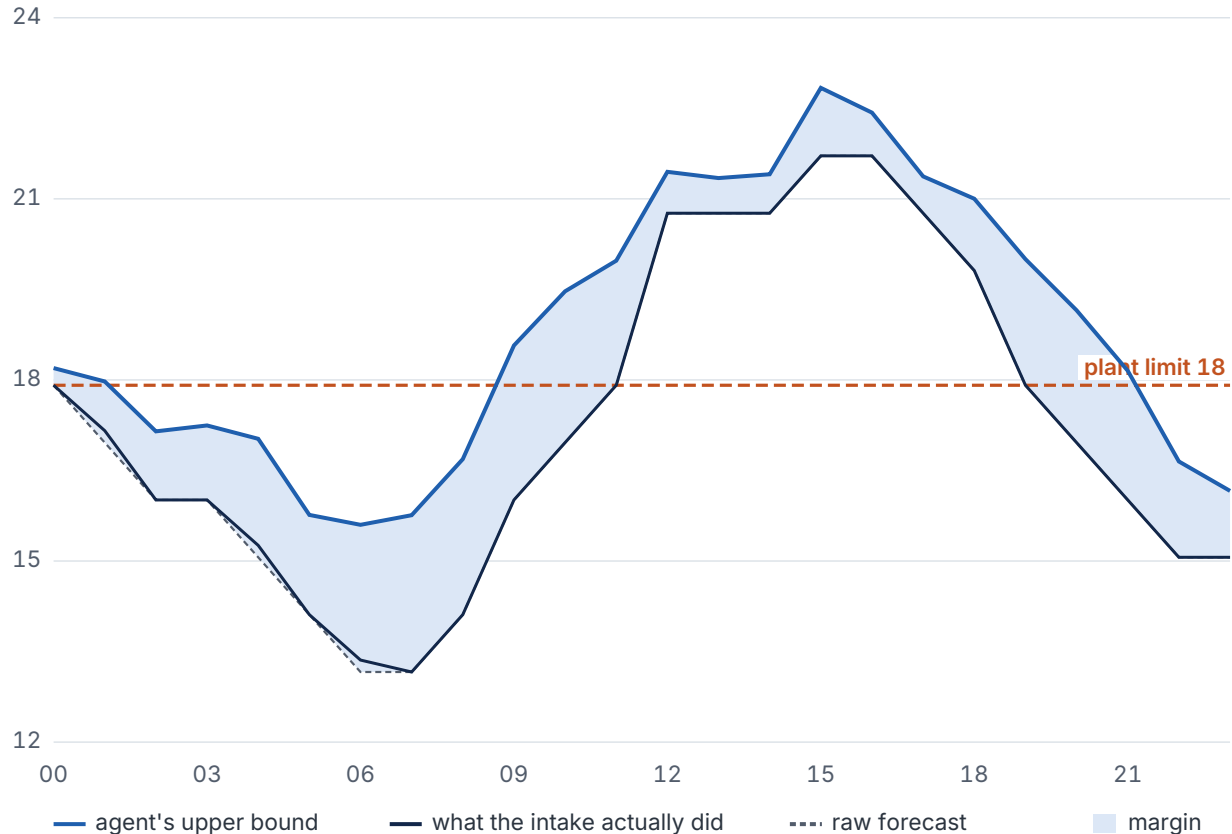

The pale band is the safety margin: the distance the agent adds on top of the raw forecast before it will commit to an hour. The blue line is the resulting upper bound, the navy line is what the intake temperature actually did, and the dashed line is the plant's limit.

Read the crossings: the actual went above the bound in 0 of the 24 hours, which is what page 6 measures directly. All 0 were hours the agent had already put on chillers, and **0 of the hours it released for free cooling exceeded the plant limit.** A bound exceeded on an hour the agent did not act on costs nothing; the hours that matter are the ones it said yes to.

Chiller runtime, agent against incumbent

hours of mechanical cooling across 912 days the agent never trained on



9.1% less chiller runtime, a share so it holds at any hall size

The comparison is against a tuned reactive controller using an on-site sensor, which is what operators verifiably run today, not against doing nothing. **Held-out** means days the agent never trained on: the record was split chronologically and the second half, 912 days, was kept back.


How the decision is made

Each hour the agent takes the forecast for this building's own tile, adds a margin, and compares the result against the plant's limit. It commits to free cooling only when the **upper bound** clears the **limit**, not when the forecast does.

Where each degree of the margin comes from

degrees Celsius added on top of the forecast

2.7

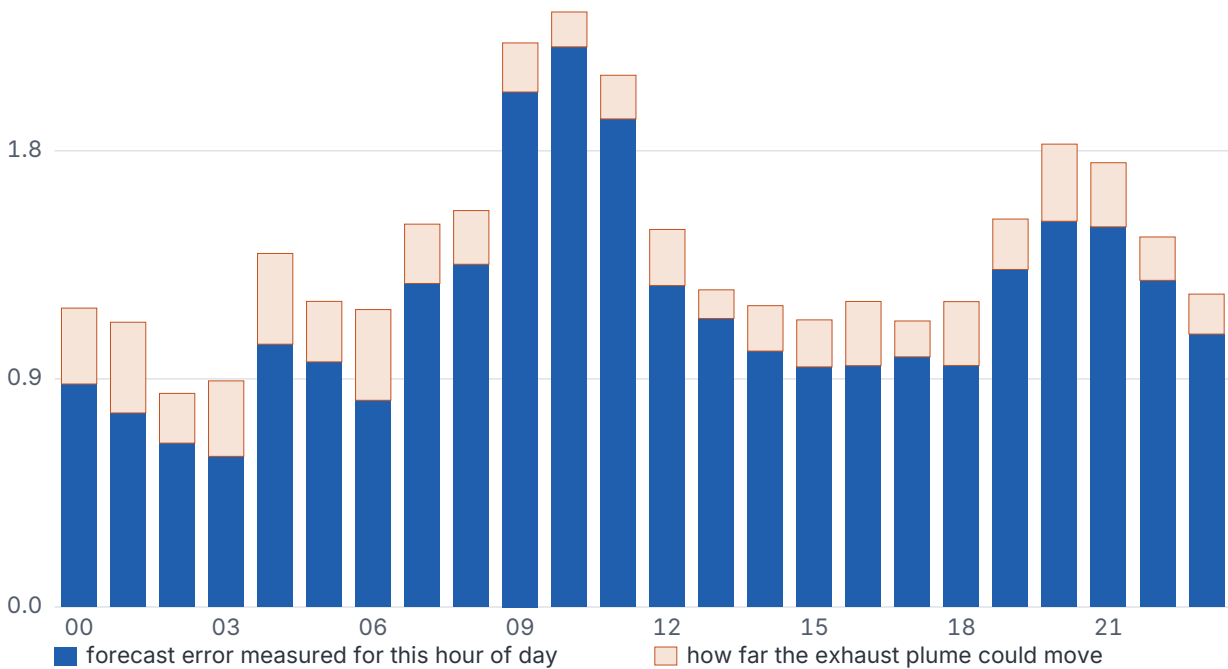

The margin is measured, not chosen. The lower part of each bar is the forecast error this agent has actually made at that hour of the day (**group-conditional**: the error is measured per hour of day rather than pooled across all of them, because a 3 a.m. forecast and a 3 p.m. forecast are not equally hard). The upper part is how far the exhaust plume could move if the wind sits differently from the direction planned for.

The gates an hour has to pass


Gate	Setting here	What it protects
Plant limit	18.0 °C	the intake temperature the hall is committed to
Dew point	15.0 °C	condensation on cold surfaces inside the hall
Notice	3 h	the plant cannot change mode instantly
Switch budget	1 per day	chillers and dampers wear out when cycled
Minimum dwell	3 h	a mode has to hold before another change is allowed

The switch budget is the reason a cold hour can still run chillers. With 1 change permitted in a day, spending one early costs the agent the ability to switch later, so it schedules the whole day at once by dynamic programming rather than deciding each hour as it arrives.

What this document is · the interface recomputes for any configuration a reader selects. This file was generated for the one named above, chosen as the configuration where this site's agent does the most while still changing mode at least once. If the screen disagrees with this page, the configuration differs.

The physics

A data centre's condensers blow hot air out of the building. When the wind sits wrong that exhaust drifts toward a neighbour's air intake, so the machine can end up breathing warmed air while the forecast still reports the ambient. The agent therefore does not trust the forecast at the intake until it has solved where the exhaust actually goes.

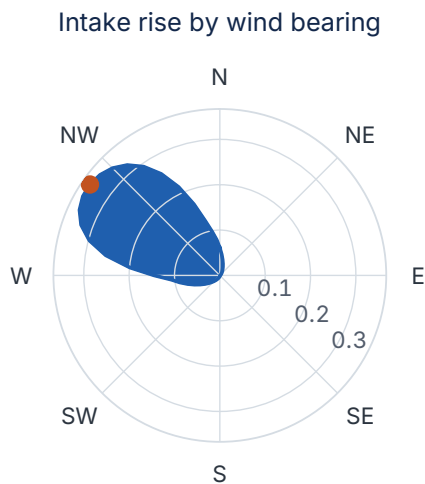

worst 0.35 °C at 305°, from 576 solves

The solve	
bearings swept	72, every 5°
wind speeds	8, 0.5 to 12 m/s
solves	576
solver	GPU (NVIDIA Warp)
wall clock	5.64 s
bearings refused	0 of 72
worst rise	0.35 °C at 305°
mean rise	0.056 °C
condenser bank	170 m of facade, 34 cells

At this placement no bearing is refused: nothing blocks the path between the exhaust and the intake, so all 72 directions return a number the agent is willing to use. The refusal is a property of geometry, not of this site, and where it does fire it is expensive: elsewhere in the sweep it costs the agent thousands of hours a year, and that cost is published rather than hidden.

576 solves, on this building's own outline. Every one of the 72 wind bearings is solved across a grid of wind speeds, on the footprints taken from OpenStreetMap rather than an idealised box. The worst case anywhere on the compass is **0.35 °C** of intake rise, at 305 degrees.


That is a small number until the bound sits on the limit, and then it decides the hour. Including this term moved unsafe hours from **1 to 12** across the five-year record and **added** free-cooling hours at the same time, because knowing where the exhaust goes lets the agent say yes on the bearings that carry it away.

Why this needs a GPU: a single solve is not the workload, the bound is. Stating "90% of the time the intake stays under X" means running the physics many times over a spread of conditions. **A hundred of these solves take about a minute on a processor and under a second on the GPU through NVIDIA Warp, and the two agree to within a ten-thousandth of a degree.** This site's table took **5.6 seconds** on GPU (NVIDIA Warp).

Validation, and how the bound is measured

Bound coverage, by population size

share of hours the real intake stayed under the bound

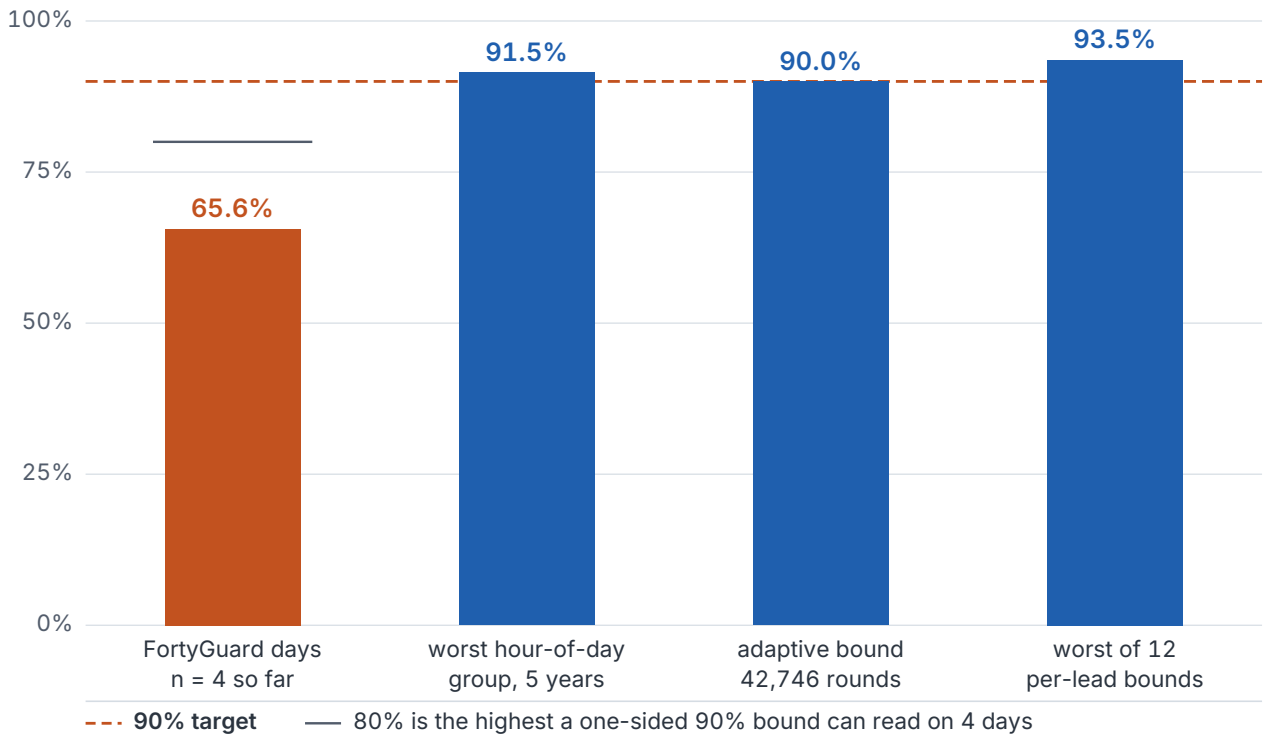

A **bound** is a number the agent commits to the real intake staying under. Coverage is the share of hours it did. The target is 90%, and each population below is as large as the record currently allows.


What the measurement shows

- The method reaches its target **wherever the record is large enough to measure it**. Twelve separately calibrated per-lead bounds, every one at or above 90%, the worst at 94%. An adaptive bound over 42,746 rounds of the five-year record realised 90%.
- **The FortyGuard-specific calibration currently rests on 4 measured forecast days**, and reads 66%. A one-sided 90% bound needs **9** such days: at 4 the arithmetic ceiling is 80%, so the target is a function of how many days have been forecast rather than of the method.
- A calibration day is **earned, not bought**. It is a forecast plus the day that follows it, so the count rises by one for every further day the site is forecast on. Nine days of operation is the whole distance between the figure above and the target.
- Conditioning already recovers **most of the gap**. Measuring the error per hour of day rather than pooling every hour together lifts the worst group from 82% to 91%.

What was tested	Volume	Result
Real recorded weather	43,249 h / 1,825 d	the record the schedule was scored on
Held-out days	912 d	never trained on
Re-plans compared	21,500	95% changed nothing at all
Free-cooling hours taken	12,588	6 unsafe, 0.48 per thousand

Scale, and what it is worth

One hall is a pilot. The agent covers **238 sites**, each built on its own OpenStreetMap footprint, its own station weather record and its own tariff, drawn from 639 tagged data centre facilities mapped across the United States.

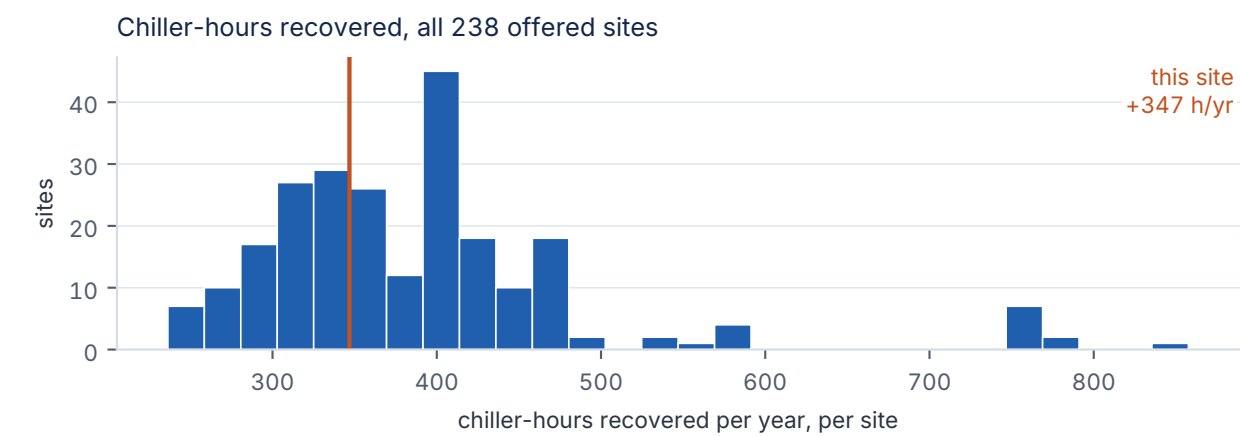

This is every site the agent is offered on. **12 more were measured and excluded** because the agent's own constraints made it worse than the incumbent there, and those are not sold without site-specific engineering work on them first: at that geometry the safety margin hands back more free-cooling hours than it wins, so the agent runs the chillers more than the controller it would replace, the worst of them by 3,649 hours a year. They are not in the chart, because an axis wide enough to hold them would compress everything above into a sixth of the frame; they are counted here instead, and they stay on the map marked measured rather than ready. A portfolio that reports where it does not work is one a reader can believe about where it does.

Who buys this

An operator running many data centres, and the engineer inside it who owns the energy number. Their tenants' service level agreements commit them to a maximum supply air temperature, so an excursion is a contract breach and not just a warm hour, which is why the conservative buffer exists in the first place. What replaces the buffer has to come with a bound and a published breach rate, or it does not get switched on.

At this site	Value	Basis
Measured footprint	101,832 m²	OpenStreetMap rings, the same outlines the solver runs on
IT load	71 to 143 MW	DERIVED from a watts per square metre density
Recovered hours	+347 h/yr	backtested
Value of those hours	\$337,304 to \$976,027 /yr	MODELED. Measured hours times published rates times derived megawatts
The rate behind it	\$4,721 to \$6,831 /MW-IT/yr	16 cells: published tariffs x published chiller efficiencies, swept

The percentage is the honest headline and the dollars are the illustration. 9.1% less chiller runtime needs no assumption about how big the building is; the money rows do, and the two that depend on one are labelled.

Appendix: every hour, and each reason once

The 24 hours of this day carry **3 distinct reasons** between them. Each is explained once below, with the hours it covers and the tightest of those hours as the worked example.

Blocked by air temperature 15 hours: 00:00 to 01:00, 09:00 to 21:00

The air was simply too warm. In each of these hours the agent's upper bound on intake temperature sat above the plant's 18.0 °C limit, so free cooling would have risked the hall. It is the bound that is compared against the limit, never the raw forecast: the margin is what makes the comparison safe rather than optimistic.

Worked example, 01:00 · ambient air 17 °C, less the 0.26 °C the forecast earns over assuming today repeats, plus 0.21 °C of plume rise at the forecast wind bearing, plus a measured 1.12 °C margin, gives a 18.07 °C bound against the 18.0 °C limit. The wind then sat somewhere slightly different, so the intake itself reached 17.21 °C: covering that difference is what the plume half of the margin is for.

Blocked by the switch budget 7 hours: 02:00 to 08:00

These hours were **cold enough to free-cool and were run on chillers anyway**, and the reason is the schedule rather than the weather. The plant permits 1 mode change a day. Spending one here would leave the agent unable to switch when a longer or colder block arrives, so the whole day is planned at once and these hours are the ones the plan gives up. This is the explanation a thermostat cannot give, because a thermostat has no plan to be constrained by.

Worked example, 03:00 · ambient air 16 °C, plus 0.41 °C where the forecast read warmer than assuming today repeats, plus a measured 0.89 °C margin, gives a 17.3 °C bound against the 18.0 °C limit. With no neighbouring hall to warm the incoming air, the intake is the ambient air, and it reached 16 °C.

Free cooling ran 2 hours: 22:00 to 23:00

Free cooling ran. In each of these hours the agent's upper bound cleared the plant limit with the full measured margin already added, so outside air did the cooling and the chillers stayed off.

Worked example, 22:00 · ambient air 15 °C, plus 0.21 °C where the forecast read warmer than assuming today repeats, plus a measured 1.46 °C margin, gives a 16.67 °C bound against the 18.0 °C limit. With no neighbouring hall to warm the incoming air, the intake is the ambient air, and it reached 15 °C.

The full schedule

hh	mode	safe	reason	bound	limit	actual	margin
00	mechanical	no	dry-bulb	18.3	18.0	18.0	1.2
01	mechanical	no	dry-bulb	18.1	18.0	17.2	1.1
02	mechanical	yes	switch budget	17.2	18.0	16.0	0.843
03	mechanical	yes	switch budget	17.3	18.0	16.0	0.893
04	mechanical	yes	switch budget	17.1	18.0	15.2	1.4
05	mechanical	yes	switch budget	15.7	18.0	14.0	1.2
06	mechanical	yes	switch budget	15.6	18.0	13.2	1.2
07	mechanical	yes	switch budget	15.7	18.0	13.0	1.5
08	mechanical	yes	switch budget	16.7	18.0	14.0	1.6
09	mechanical	no	dry-bulb	18.7	18.0	16.0	2.2

hh	mode	safe	reason	bound	limit	actual	margin
10	mechanical	no	dry-bulb	19.6	18.0	17.0	2.3
11	mechanical	no	dry-bulb	20.2	18.0	18.0	2.1
12	mechanical	no	dry-bulb	21.7	18.0	21.0	1.5
13	mechanical	no	dry-bulb	21.6	18.0	21.0	1.3
14	mechanical	no	dry-bulb	21.7	18.0	21.0	1.2
15	mechanical	no	dry-bulb	23.2	18.0	22.0	1.1
16	mechanical	no	dry-bulb	22.8	18.0	22.0	1.2
17	mechanical	no	dry-bulb	21.6	18.0	21.0	1.1
18	mechanical	no	dry-bulb	21.3	18.0	20.0	1.2
19	mechanical	no	dry-bulb	20.2	18.0	18.0	1.5
20	mechanical	no	dry-bulb	19.3	18.0	17.0	1.8
21	mechanical	no	dry-bulb	18.3	18.0	16.0	1.8
22	free	yes	-	16.7	18.0	15.0	1.5
23	free	yes	-	16.2	18.0	15.0	1.2

What would change the answer

The hours above that ran chillers on a named schedule constraint were not held by the weather.

Re-planning this same day with the switch budget raised from **1 to 3** releases **7 of the 24 hours** to free cooling. Re-planning it with the minimum dwell cut from 3 h to 1 h releases **0**. On this day and this configuration the binding constraint is the number of mode changes the plant permits, not its dwell requirement and not the air.

Change to the plant's own limits	Hours released	Which hours
switch budget 1 per day to 3	+7	02:00 to 08:00
minimum dwell 3 h to 1 h	+0	none

That is a re-plan, not a promise. The switch budget exists because cycling chillers and dampers wears them out, so the hours above are available only if the plant is willing to pay that wear, and the agent deliberately does not make that trade on the operator's behalf. What it does is price it: this is the number an engineer needs in order to decide whether the setting is worth revisiting. Each of the 7 is re-planned and re-checked in `explain.py` before it may be printed here.

Generated by AGENTIC-ARBITER/src/site_report.py from this site's own artefacts. Every figure here is read from the file that produced it; the rows labelled MODELED are the only ones resting on an unmeasured assumption.